


10-bit digital video with
bi-directional and up-the-coax data



Description

The ComNet™ FVT/FVR1031 series video transmitter/receiver and data transceiver supports simultaneous transmission of short-haul quality 10-bit digital video, bi-directional data and up-the-coax data over one multimode or single mode optical fiber. The module is universally compatible with major CCTV camera manufacturers and supports RS232, RS422 and 2 or 4-wire RS485 data interfaces, and most major data protocols as well as up-the-coax data. The FVT/FVR1031 allows the user to choose bi-directional data or up-the-coax data through a switch on the unit. Plug-and-play design ensures ease of installation and no electrical or optical adjustments are ever required. Bi-color (Red/Green) LED indicators are provided for rapidly ascertaining equipment operating status. Packaged in the exclusive ComNet ComFit housing, these units may be either wall or rack-mounted, or may be DIN-rail mounted by the addition of ComNet model DINBKT1 adaptor plate.

Features

- 10-bit digitally encoded video transmission
- Exceeds all requirements for RS-250C short-haul transmission: True broadcast video performance
- Supports RS232, RS422 or RS485 (2 or 4-wire) data interfaces
- Compatible with all NTSC, PAL, or SECAM CCTV camera systems
- Tested and certified by an independent laboratory for full compliance with the environmental requirements (ambient operating temperature, mechanical shock, vibration, humidity with condensation, high-line/low-line voltage conditions and transient voltage protection) of NEMA TS-1/TS-2 and the Caltrans Specification for Traffic Signal Control Equipment.
- Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
- Automatic resettable fuses on all power lines
- Hot-Swappable Modules
- Distances up to 43 miles (69 km)
- Bi-color (Red/Green) LED status indicators provide rapid indication of critical operating parameters
- Interchangeable between stand-alone or rack mount use - ComFit
- Lifetime Warranty

Applications

- High Performance CCTV with PTZ Camera Control



specifications

VIDEO

Video Input:	1 volt pk-pk (75 ohms)
Overload:	>1.5V pk-pk
Bandwidth:	5 Hz - 10 MHz
Differential Gain:	<2%
Differential Phase:	<0.7°
Tilt:	<1%
Signal-to-Noise Ratio (SNR):	67 dB @ Maximum Optical Loss Budget
Max. RG-59 COAX Distance:	100m (300ft) Camera to Fiber Optic Module to maintain 6Mhz Bandwidth

DATA

Data Format:	RS-232, RS-422, 2 or 4-wire RS-485 w/Tri-State, Manchester, bi-phase and up-the-coax data
Data Rate:	DC-115 Kbps (NRZ)
WAVELENGTH	1310/1550 nm, MM and SM
NUMBER OF FIBERS	1
OPTICAL EMITTER	Laser Diode
LED INDICATORS	- Video Sync Presence - Received Data - Transmitted Data - Optical Carrier Detect

CONNECTORS

Optical:	ST (Standard) SC or FC (Optional)
Power:	Terminal Block
Video:	BNC (Gold Plated Center-Pin)
Data:	Terminal Block

ELECTRICAL & MECHANICAL

Power:	8-15 VDC @ 2W
Surface Mount:	From Rack
Rack Mount:	1
Number of Rack Slots:	Automatic Resettable Solid-State Current Limiters
Current Protection:	Meets IPC Standard
Circuit Board:	6.1 x 5.3 x 1.1 in., (15.5 x 13.5 x 2.8 cm)
Size (in./cm) (LxWxH):	<2 lb./0.9 kg
Shipping Weight:	

ENVIRONMENTAL

MTBF:	>100,000 hours
Operating Temp:	-40° C to +75° C
Storage Temp:	-40° C to +85° C
Relative Humidity:	0% to 95% (non-condensing)*

* May be extended to condensation conditions by adding suffix '/C' to model number for conformal coating.




PART NUMBER	DESCRIPTION	FIBERS REQ'D	FIBER	OPTICAL PWR BUDGET	MAX. DISTANCE†	MAX. UTC DISTANCE†	# RACK SLOTS
FVT1031M1	Video Transmitter/Data Transceiver	1	Multimode 62.5/125µm	16 dB	3 km (2 mi)	1 km (0.6 mi)	1
FVR1031M1	Video Receiver/Data Transceiver						
FVT1031S1	Video Transmitter/Data Transceiver	1	Single Mode 9/125µm	23 dB	69 km (43 mi)	1 km (0.6 mi)	1
FVR1031S1	Video Receiver/Data Transceiver						
Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included)						
Options	Add '/C' for Conformally Coated Circuit Boards (Extra charge, consult factory) Add '/SC' for SC Connectors Add '/FC' for FC Connectors DIN-Rail Mounting Adaptor Plate Kit – With mounting hardware (Optional, order model DINBKT1)						

NOTE: This product requires a fiber installation with a minimum 30 dB connector return loss. The use of Super Polish Connectors is recommended.

†Distance may be limited by optical dispersion. **Check with control system manufacturer for distance limits on up-the-coax systems.**

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J

In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

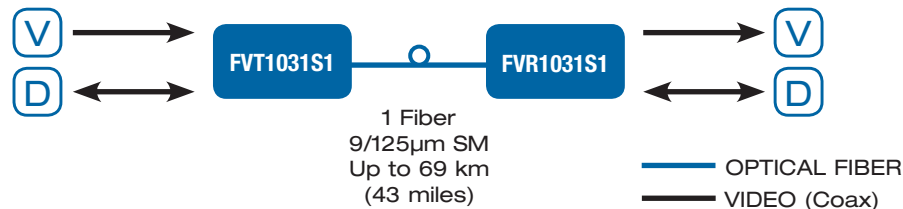

3 CORPORATE DRIVE | DANBURY, CT 06810 | USA
T: 203.796.5300 | F: 203.796.5303 | TECH SUPPORT: 1.888.678.9427 | INFO@COMNET.NET

8 TURNBERRY PARK ROAD | GILDERSOME | MORLEY | LEEDS, UK LS27 7LE
T: +44 (0)113 307 6400 | F: +44 (0)113 253 7462 | INFO-EUROPE@COMNET.NET