


① IRIS CABLE	(+)	RED	INPUT VOLTAGE
	(-)	BLACK	GROUND
		WHITE	VIDEO SIGNAL
		GREEN	REMOTE CONTROL

② MOTOR CABLE	(+)	GREEN	FOCUS NEAR
	(+)	BLACK	FOCUS FAR
	(+)	YELLOW	ZOOM IN
	(+)	RED	ZOOM OUT

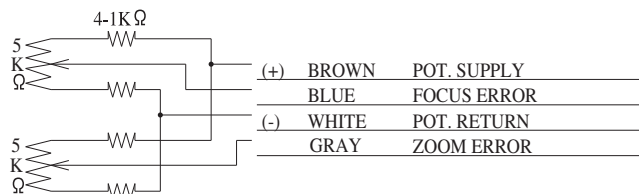


(+)	BROWN	POT. SUPPLY
	BLUE	FOCUS ERROR
(-)	WHITE	POT. RETURN
	GRAY	ZOOM ERROR

SPECIFICATION

1.	USE	FOR 1/2 COLOR .B/W CAMERA	
2.	FOCAL LENGTH	f= 8 ~ 80 mm	
3.	IRIS RANGE	F= 1.8 ~ 360	
4.	IMAGE SIZE	φ 8 (x4.8) 6.4	
5.	BACK FOCAL LENGTH	14.66mm in air	
6.	FLANGE FOCAL LENGTH	17.52mm in air	
7.	FOCUS RANGE	∞ ~ 1.2m	
8.	FIELD ANGLE	DIA.	(W) 53.6 ° (T) 5.8 °
		HOL.	43.6 ° 4.6 °
		VER.	33.0 ° 3.5 °
9.	FIELD OF VIEW AT M.O.D.	DIA.	1133.6mm 153.3 mm
		HOL.	903.4 mm 92.4 mm
		VER.	626.6 mm 69.3 mm
10.	DISTORTION	-0.9% %	+0.10%
11.	LENS CONSTRUCTION	13 GROUPS 16 ELEMENTS	
12.	CLEAR APERTURE	FRONT φ46	REAR φ 14.2
13.	EXIT PUPIL POSITION	-83.4 mm (format)	
14.	WEIGHT	550 g (570 g)	

DC (DIRECT CONTROL)

DRIVE COIL	RESISTOR	190 Ω (20° C)
	COLOR	RED(+) 4pin BLACK 3pin
BRAKE COIL	RESISTOR	1150 Ω (20° C)
	COLOR	YELLOW(+) 2pin GREEN 1pin
DRIVE VOLT.	OPEN	LESS THAN +4V
	CLOSE	OVER THAN OV W/CLOSING SPRING



品名 **GAZ80800B**

部番