



LBC 3201/00 Line Array Indoor Loudspeaker



- ▶ Extended listening area
- ▶ Excellent intelligibility of speech and music
- ▶ Uniform distribution of natural sound throughout the room
- ▶ Excellent directivity for use in acoustically difficult, reverberant applications
- ▶ Suitable for larger venues, like meeting halls and places of worship
- ▶ Ultra-slim housing
- ▶ Voice evacuation compliant as standard

This loudspeaker, with its excellent directivity and high power output, can handle medium and large (reverberant) indoor venues, especially the more acoustically challenging ones. It is typically used in congress venues, meeting halls and places of worship. The full frequency range of the LBC 3201/00 makes it ideal for speech as well as music reproduction. Its exceptionally narrow housing (only 8 cm wide) means it is extremely unobtrusive.

Functions

Range of Application

The LBC 3201/00 is part of the XLA 3200 (eXtended Listening Area) range of line array loudspeakers. Advanced filtering and positioning of the loudspeaker drivers* has resulted in greatly improved audio directivity. Each speaker driver produces a dedicated frequency range. The special developed high quality drivers enable reproduction of remarkably clear, natural sound which gives excellent intelligibility of both speech and music.

The difference between a conventional column loudspeaker and this line array is noticeable in several ways. There is uniform sound distribution throughout the whole listening area: not too loud at the front, not too quiet at the back. All relevant frequencies are present

everywhere in the listening area. Greater coverage is achieved, so more people can be reached with speech and music with a higher intelligibility level. All these important features will give the experience of a very natural sound quality in the whole listening area.

*patent pending

Easy Installation

The advanced filtering generates larger vertical opening angles for high frequencies, so there is less narrow 'beaming' of higher tones in the vertical plane. As an example, at 4 kHz the vertical opening angle is still 22°. Having more constant vertical opening angles makes installation easier, as the positioning of the loudspeakers is less critical because they cover a wider area. An extremely wide horizontal opening angle of 132° at 4 kHz means that a single loudspeaker can provide natural sound reproduction over an extensive listening area.

Suppressed Side Lobes

All conventional column loudspeakers produce a main lobe of sound which is directed at listeners, and a number of unwanted side lobes. The LBC 3201/00 has highly suppressed side lobes in the vertical plane, typically at least 10 dB suppression from the 250 Hz octave band at 90°, resulting in a much clearer, less

'colored' sound, even when close to the loudspeakers. This gives the line array superb speech intelligibility.

Sound Reproduction

The positioning and very high quality of the 2-inch drivers contribute significantly in making the LBC 3201/00 a very efficient line array. With a sound pressure level of 110 dB at 1 m, at 60 W, loud and clear sound reproduction is possible even at considerable distances from the loudspeaker.

The high-quality loudspeaker drivers used in the LBC 3201/00 give excellent, natural sound reproduction of frequencies ranging from 190 Hz to 18 kHz. Together with the constant directivity this ensures that all important frequencies are heard in the listening area.


EVAC Compliant

The loudspeakers ceramic terminal block, thermal fuse and heat-resistant, high-temperature wiring, ensures that, in the event of a fire, damage to the loudspeaker does not result in failure of the circuit to which it is connected. In this way, system integrity is maintained, ensuring loudspeakers within the same loudspeaker zone in other areas can still be used to inform people of the situation.

A three-way ceramic terminal block with screw connections suitable for loop-through wiring is located in a compartment at the base of the loudspeaker column. There is also a switch which allows the selection of nominal full power (60 W), half power (30 W) or quarter power (15 W). The compartment has knock-out slots for accommodating cables.

System Overview


A time- and labor-saving mounting method has been developed for the LBC 3201/00. A chart is supplied with the loudspeaker, which shows the ideal installation height for the area the loudspeaker has to cover. Once the appropriate height has been determined for a given area, the loudspeaker is mounted at an angle marked on the mounting bracket. This simple procedure is very much simpler and more accurate than traditional trial and error installation methods. The LBC 3201/00 can be mounted on a wall or directly onto a floor stand LBC 1259/00 with an M10 threaded bolt without additional accessories.



Mounting bracket (included) with marked angle. Dimensions (in mm)



Detail mounting bracket

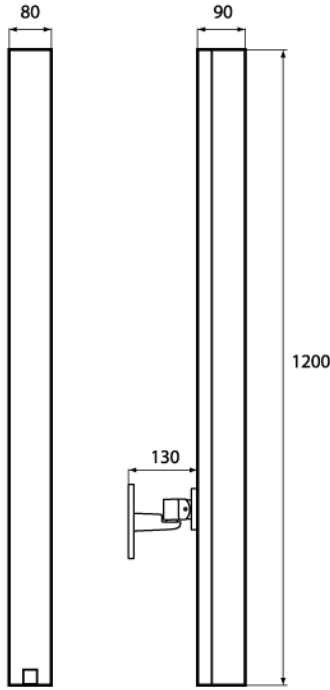

Dimensions (in mm)




Mounted on optional loudspeaker stand (LBC 1259/00)

Certifications and Approvals


All Bosch loudspeakers are designed to withstand operation at their rated power for 100 hours in accordance with IEC 268-5 Power Handling Capacity (PHC) standards. These loudspeakers also comply with the Simulated Acoustical Feedback Exposure (SAFE) test, which demonstrates that they can withstand acoustical feedback at full power for short durations. This ensures extra reliability under extreme conditions, leading to higher customer satisfaction, longer operating life and much less chance of failure or performance deterioration.

Safety acc. to EN 60065 and CE
 EVAC Compliant BS 5839 part 8 and IEC 60849

Installation/Configuration Notes

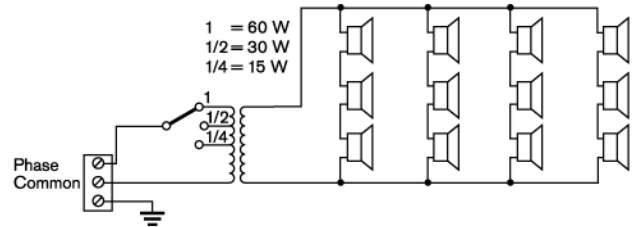

Circuit diagram

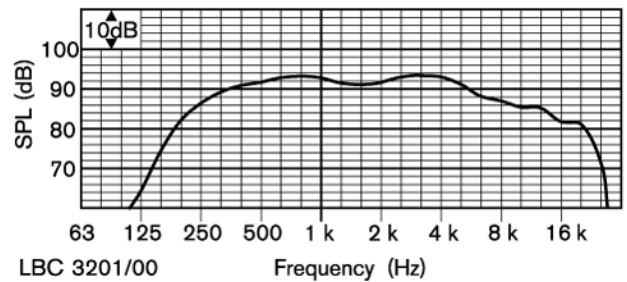


Frequency response


Octave band (Hz)	250	500	1k	2k	4k	8k
SPL 1.1	88	92	92	91	91	86
SPL max.	106	110	110	109	109	104
Q-factor	2.2	3.2	6.5	12.6	23.4	53.3
Hor. angle (deg)	360	360	210	192	132	100
Vert. angle (deg)	107	67	50	33	22	12

Quick reference table


LBC 3201/00
250Hz horizontal

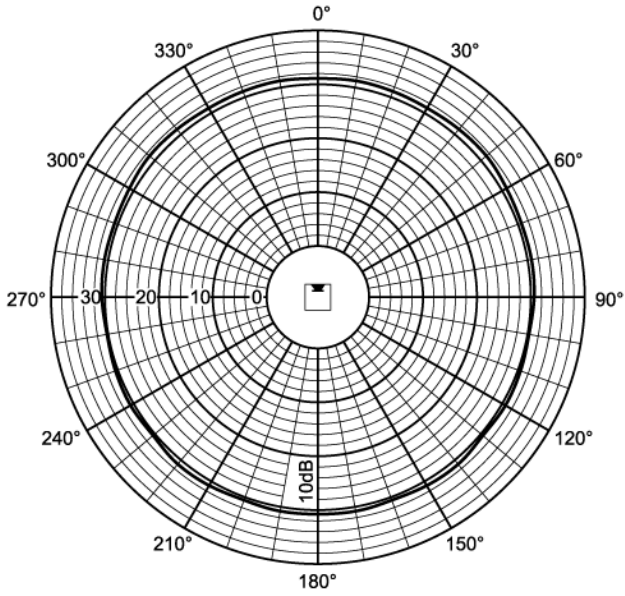


LBC 3201/00
500Hz horizontal

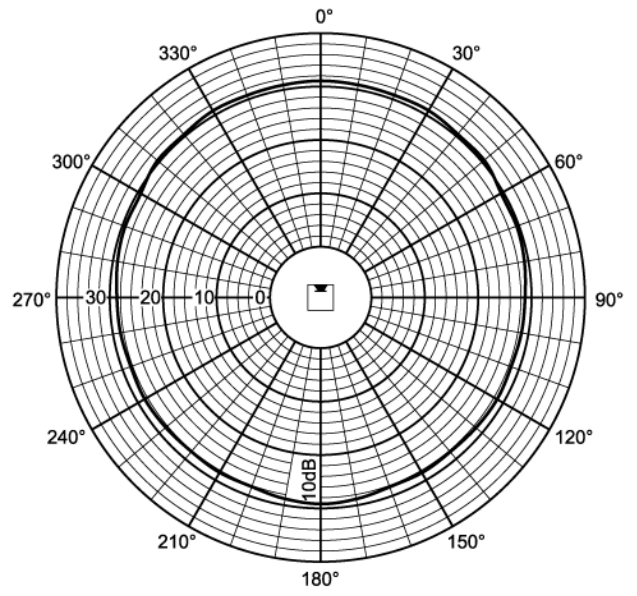


LBC 3201/00
250Hz vertical

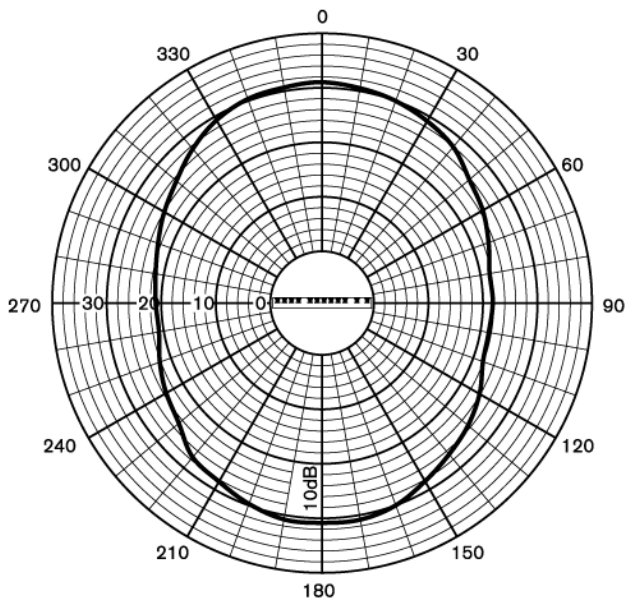


LBC 3201/00
500Hz vertical

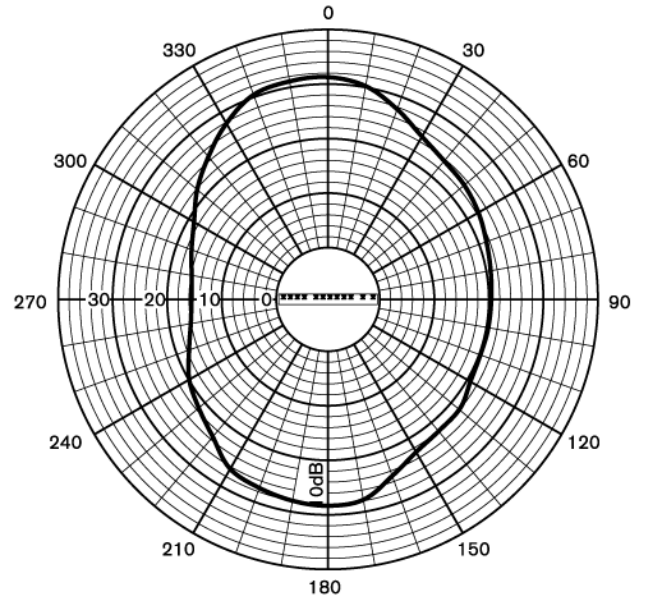


LBC 3201/00
1kHz horizontal

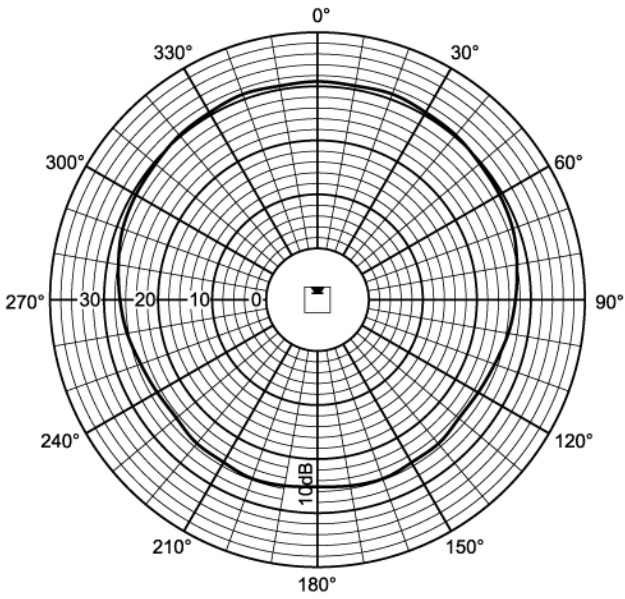


LBC 3201/00
2kHz horizontal

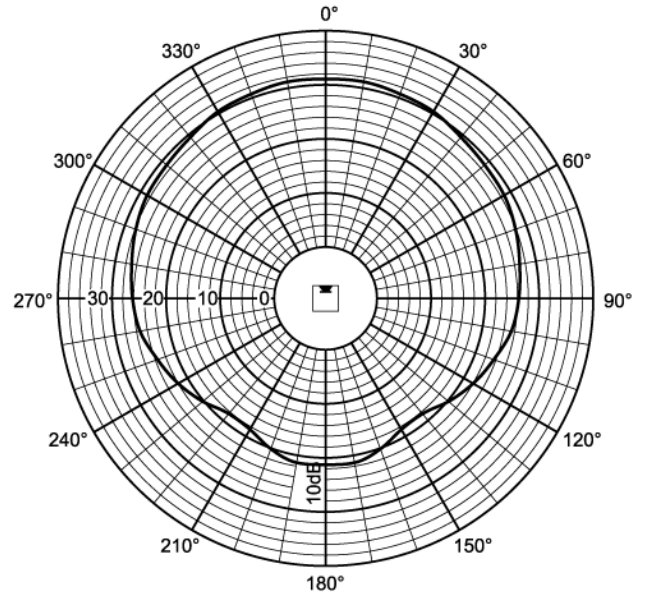


LBC 3201/00
1kHz vertical

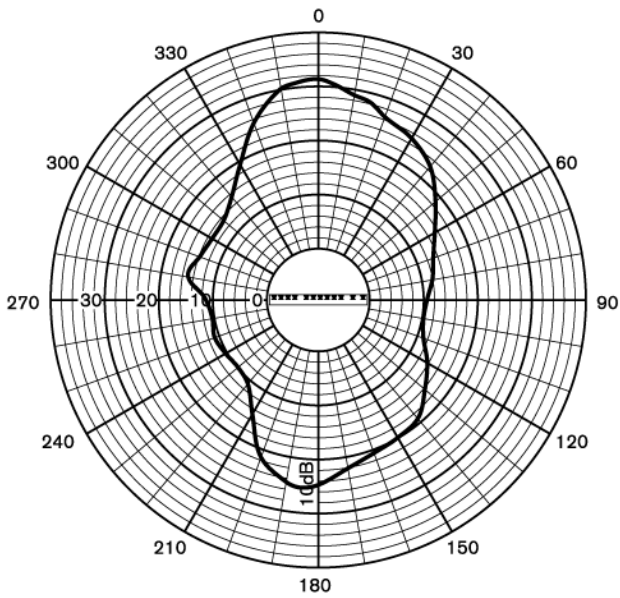


LBC 3201/00
2kHz vertical

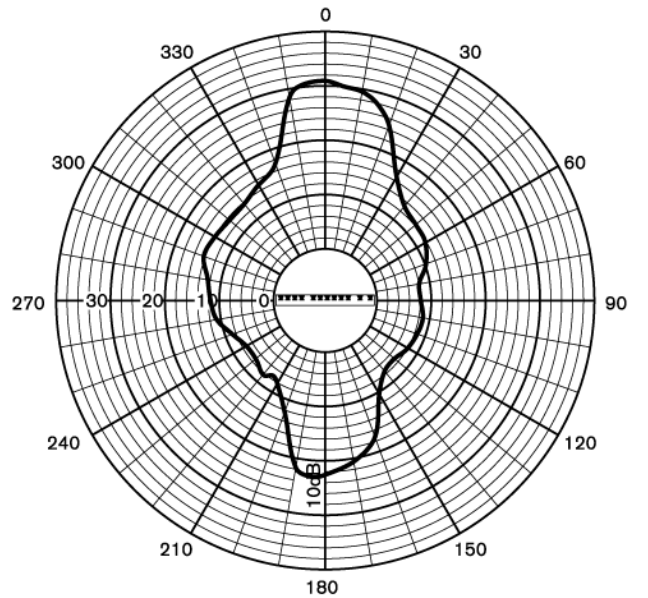


LBC 3210/00
4kHz horizontal

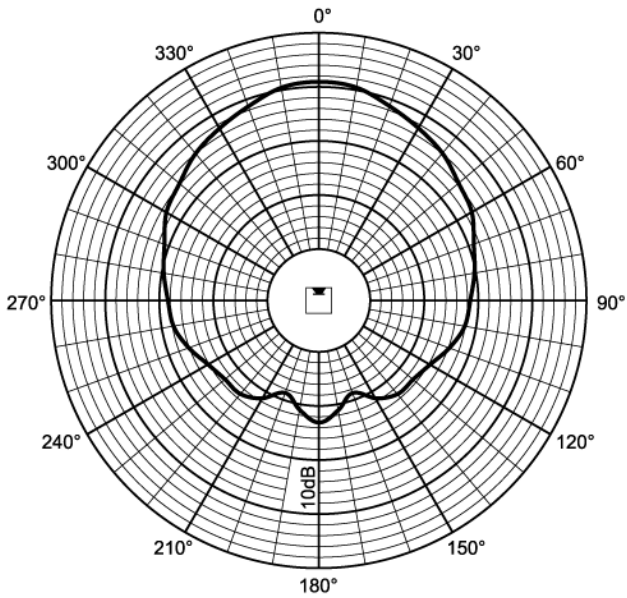


LBC 3201/00
8kHz horizontal

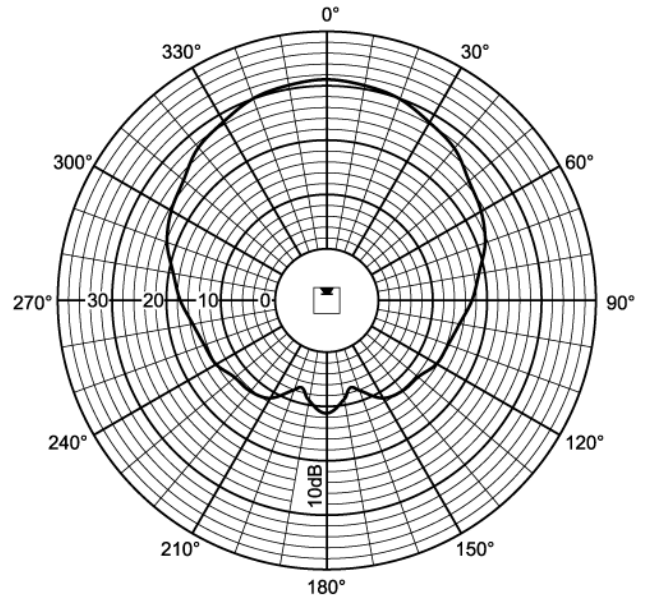

LBC 3201/00
4kHz vertical

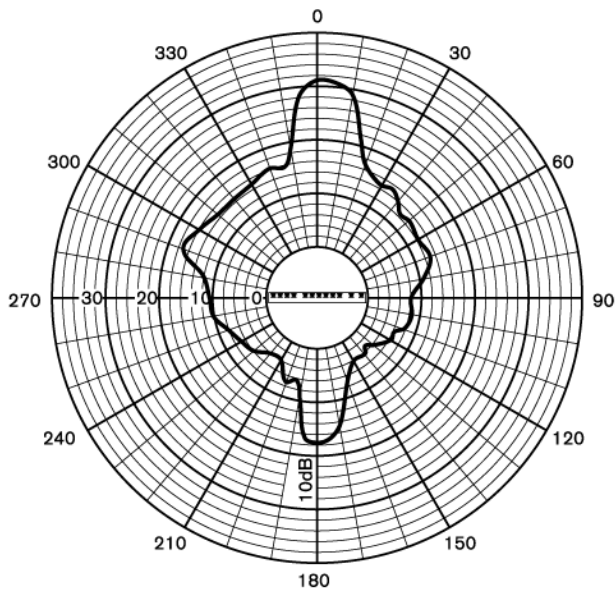

LBC 3201/00
8kHz vertical

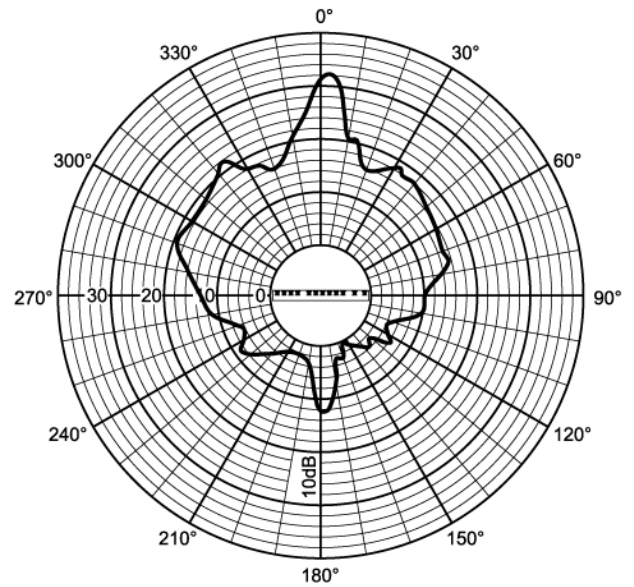

Parts Included

Quantity	Components
1	LBC 3201/00 Line Array Loudspeaker
1	Wall Mounting Bracket
1	Installation Chart

Technical Specifications

Electrical*

Maximum Power	90 W
Rated Power	60 W (60-30-15 W)
Sound Pressure Level at 60 W/1 W (at 1 kHz, 1 m)	110 dB/92 dB (SPL)
Effective Frequency Range (-10 dB)	190 Hz to 18 kHz
Opening Angle (at 1 kHz / 4 kHz, - 6 dB)	
Horizontal	210° / 132°
Vertical	50° / 22°
Rated Input Voltage	100 V
Rated Impedance	167 ohm

Mechanical

Connection	Screw terminal block
Dimensions (H x W x D)	1200 x 80 x 90 mm (47.24 x 3.15 x 3.54 in)
Color	Silver
Weight	6,4 kg

Environmental

Ambient Temperature	-25°C to +55°C
---------------------	----------------

*) Technical performance data acc. to IEC 60268-5

Ordering Information

Model | Description

LBC 3201/00 Line Array Indoor Loudspeaker
for medium and large (reverberant) indoor venues, 60 W

Hardware Accessories

LBC 1259/00 Loudspeaker Floor-stand

Americas:
Bosch Security Systems
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 585 223 4060
Fax: +1 800 289 0096
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 (0) 40 27 83955
Fax: +31 (0) 40 27 86668
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:
Bosch Security Systems Pte Ltd
38C Jalan Pemimpin
Singapore 577180
Phone: +65 6319 3450
Fax: +65 6319 3499
apr.securitysystems@bosch.com
www.boschsecurity.com

Represented by