



METAL CASE LED

DSM19LED-WGF

19" Active Matrix with Glass Front, Metal Case

DSM19LED-WGF

Panel Type	19" (4:3) LED Monitor with Glass Front
Case Type	Metal
Maximum Resolution	1280 (H) x 1024 (V)
Active Display Area	376.32 (H) x 301.056 (V) mm
Pixel Pitch	0.294 (H) x 0.294 (V)
Bezel Thickness	Top & Bottom: 14.1mm, Sides: 13.5mm
Contrast Ratio	1000: 1 Ratio
Brightness	250 cd/m ²
Response Time	5ms
Viewing Angle	U/D: 85° / 85° L/R: 89° / 89°
Display Colours	16.7 M
Video Synchronization	TTL Positive or Negative
PC Compatible Frequency	30-80KHz(H) / 50-75Hz(V)
Adjustable Colour Temperature	9300K / 6500K / 5800K / User
Video Compatibility	Multi-Standard for NTSC / PAL
Aspect Ratio	4:3
VGA Auto Frequency correction	Yes
Speaker	Multimedia Speakers
Number of Speakers	Right x 1 Left x 1, 2.5W
Sound Demodulation	Stereo. Audio
Mute	Yes
Work Humidity	20 % - 70 %
Work Temperature	-10 to 50 °C
Volume +/- Power On/Off	Yes



POWER

Power Supply	12VDC, 3amp
Voltage	AC100 - 240V 50 / 60Hz
Power Consumption	<18W in ON mode

OSD CONTROLS

Contrast, Brightness, OSD Duration, H-Position, V-Position, Language, Picture Mode, Colour Temp, Scale, Saturation, Backlight, Sleep Timer, Sound, Memory Recall.

OSD LANGUAGE


English, French, German, Spanish, Italian, Russian, Polish and Portuguese

ACCESSORIES

Power Supply / Kettle Lead / VGA Cable / Audio Cable / User Manual / Remote Control

IN/OUT INTERFACE

Video Interface	HDMI x1, VGA x 1 BNC x 2 In / BNC x 1 Out
Audio Interface	Audio in x 1, Audio L x 1, Audio R x 1
Power Interface	DC In x 1
Termination	75 Ohms (Automatic termination)
Safety & EMC Certification	Energy Star / CE / FCC / ROHS / WEEE
Vesa Standard Mount	100 x 100 mm
Stand Type	Desktop
Colour	Black
Button Position	Right Hand Side
Packing Dimension	490 (W) x 510 (H) x 165 (D) mm
NET Weight	4.9 Kg
GROSS Weight	6.3 Kg

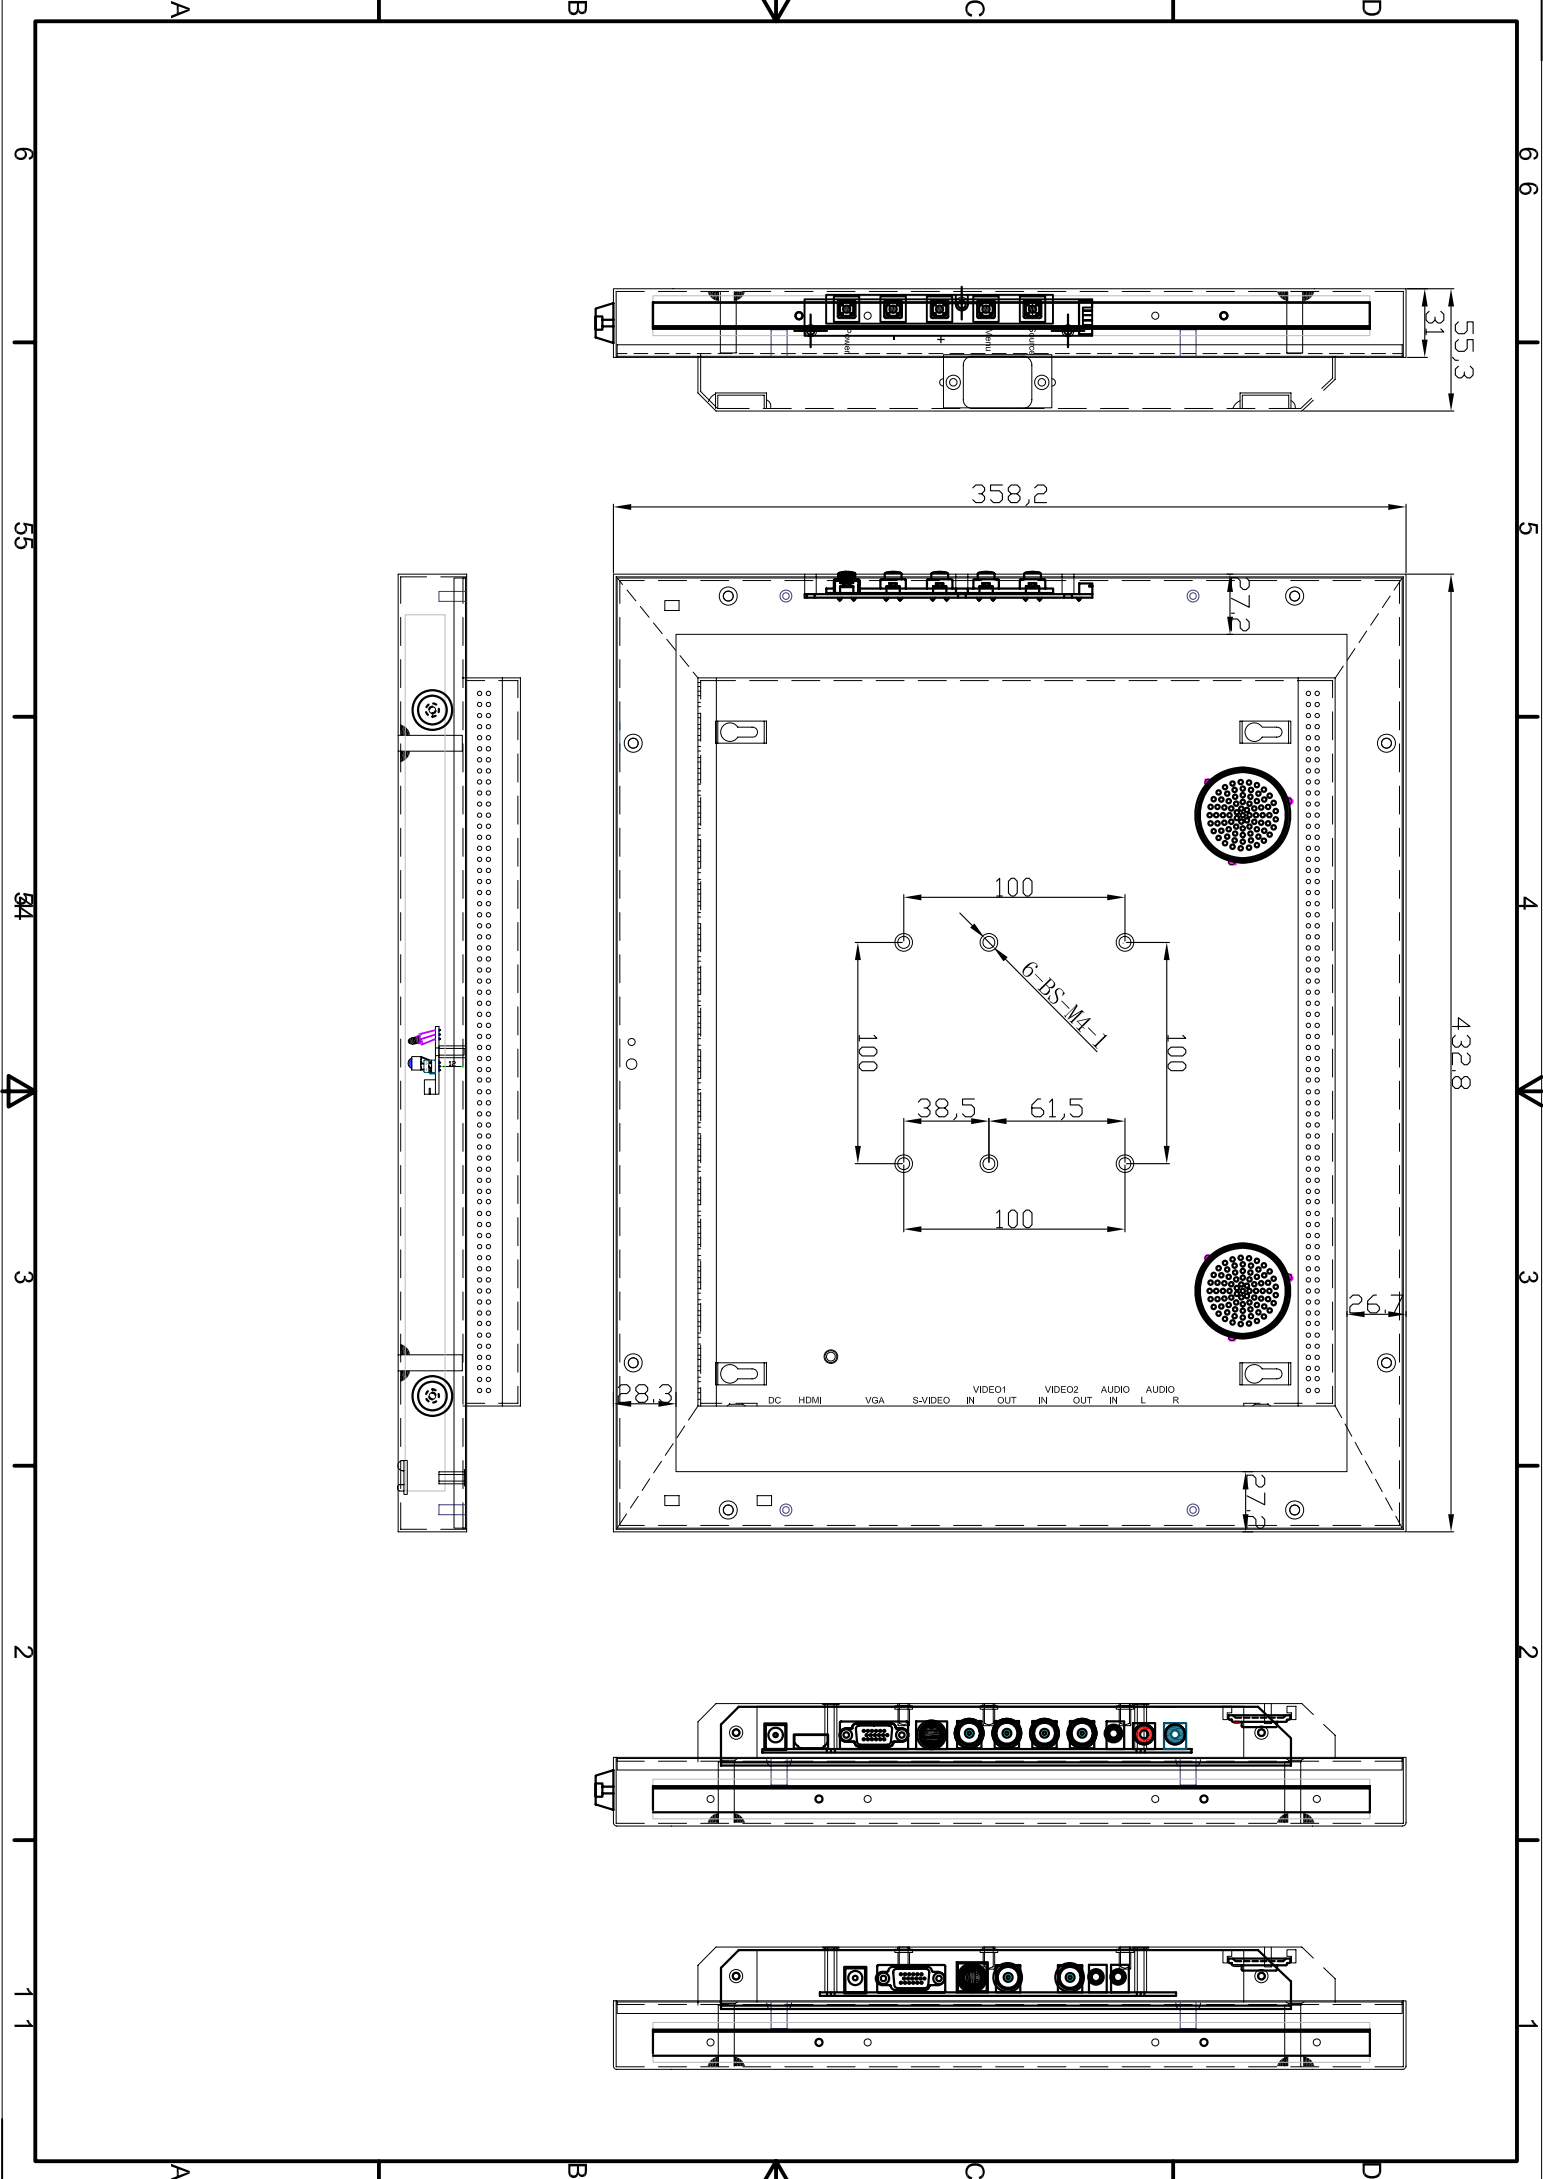

6 6 55 304 3 2 1 1

A B C D

660 432.8

55.3

358.2

27.2

100

100

6-BS-M4-1

38.5

61.5

100

26.7

27.2

28.3

DC HDMI VGA S-VIDEO VIDEO1 VIDEO2 AUDIO AUDIO

IN OUT IN OUT IN L R

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66

A B C D

660 432.8

55.3

358.2

27.2

100

100

6-BS-M4-1

38.5

61.5

100

26.7

27.2

28.3

DC HDMI VGA S-VIDEO VIDEO1 VIDEO2 AUDIO AUDIO

IN OUT IN OUT IN L R

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66

A B C D

660 432.8

55.3

358.2

27.2

100

100

6-BS-M4-1

38.5

61.5

100

26.7

27.2

28.3

DC HDMI VGA S-VIDEO VIDEO1 VIDEO2 AUDIO AUDIO

IN OUT IN OUT IN L R

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66

A B C D