

MDVR 720P CVBS Hybrid




Specification

- Video Compress : H.264 Baseline / Main Profile@Level1-4.2
- Audio Compress : 2CH G.711
- Full record / Parking Record (time Adjustable)
- Ethernet : RJ45 Giga x 1 (Static / DHCP)
- 3G / 4G LTE : Build-in for option
- WiFi : Build-in for option
- Build-in Alarm : 6CH
- Build-in Output : 2CH TTL Output
- Firmware Upgrage : USB 2.0
- Build-in GPS
- Build-in G-sensor
- Support Car speeding pulse in
- Support TPMS Detection (TTL / RS232)
- Buzzer Speaker
- Build-in Temperature sensor
- USB 2.0 x 1
- Support RS485
- Support RS232
- Support Multi Language (Customized ability)
- Two level password for System & Storage format
- Support Car Voltage Detect
- System Fail report : Temperature / SD / Voltage / GPS / G-sensor
- PTZ : Pelco - P / D
- Boot delay : 0 ~ 10 sec
- DC 12V output for camera
- Power in : 9 ~ 36V (DC)
- Power Consumption : 6.2W (without network & power output for camera)
- Operation Temperature : -40°C~+80°C

Model

DV-3604T 3G / 4G

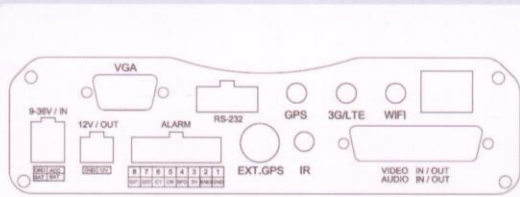

Software / Application

- PC Server / Client remote viewer
- iOS / Android client remote viewer ; Event Message / push video
- PC Viewer : Self-Playback viewer
- Dimension / Weight : 202(W) x 50(H) x 150(D)mm ; 850g

Product Parameters

Itmes		DV-3604T
	Resolution	4CH AHD 720P
Digital processing	Video bitrate (Analog)	D1 / 960H : 1920K ~ 2688K bps 720P : 2700K ~ 3072K bps
	Video Storage (Analog)	D1 / 960H : 2300 ~ 3100 MBytes / Hour (4CH) 720P : 3900 MBytes / Hour (4CH)
Playback (Full channel)	AV Compress	4CH AHD 720p@30fps 4CH 960H@30fps 2CH AHD 720P@30fps + 2CH 960H@30fps
	Search Playback	2CH Audio Time index / Time Direct / Event
Network	Resolution	4CH CIF@30fps / QCIF@30fps 2CH Audio
AV in / out connector	Video input	BNC x 4
	Video output	RCA x 1 / VGA x 1 (800 x 600)
	Mic in	No Support
	Audio input	RCA x 2
	Audio output	RCA x 1
Storage & Backup	Live Display Split	1 / 4
	SD	SDXC x 2 ; Max 256G (@128G)
	Backup	USB 2.0 / Network