


PRODUCT




◀ LED Highbay Light
HALO SERIES
50W-240W



◀ LED Highbay Light
4BAY SERIES
100W-480W



◀ LED Flood Light
T400 SERIES
60W-600W



◀ ULTRA Flood Light
T500 SERIES
480W-1440W



◀ LED Post Top Light
HALO-L SERIES
50W-240W



◀ LED Street Light
T400L SERIES
120W-400W



◀ LED Street Light
L300 SERIES
60W-240W



◀ G TRACK /
DOWN LIGHT
15W

G-COMIN

Innovative LED Light Manufacturer



SHENZHEN COMING TECHNOLOGY CO.,LTD

+86-755-28462760

info@co-ming.com

www.co-ming.com

Coming Industrial Park

Longgang District

Shenzhen China

Highbay Light HALO



CO-HALO-50W

8,000LM±5%
3.2kg±5%
ø380x63mm

CO-HALO-80W

12,800LM±5%
3.6kg±5%
ø380x63mm

CO-HALO-100W

16,000LM±5%
3.8kg±5%
ø380x63mm

CO-HALO-150W

24,000LM±5%
3.8kg±5%
ø380x63mm

CO-HALO-200W

32,000LM±5%
5.6kg±5%
ø500x68mm


CO-HALO-240W

38,400LM±5%
5.6kg±5%
ø500x68mm



Specifications

WATTAGE	50/80/100/150/200/240W
DRIVER	MEANWELL
LAMP EFFICIENCY	160LM/W±5%
LIGHT SOURCE	LUMILEDS
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
BEAM ANGLE	60°/90°/120°
IP GRADE	IP66
OPERATING TEMP	-40°C~55°C

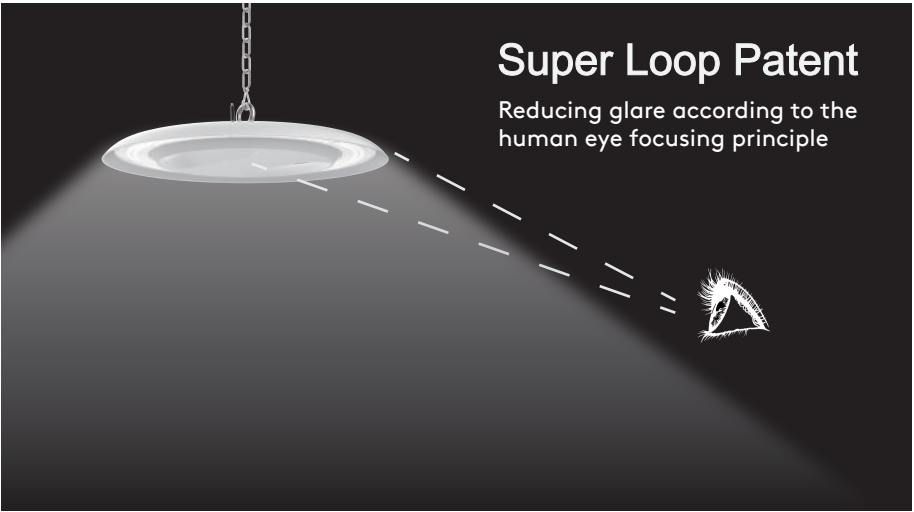

► IP66 & nano-coating,
minimize maintenance cost.

► Compact curve surface design,
too smooth to gather dirt.



Food Processing Light



CO-HALO-F50W

8,000LM±5%
3.2kg±5%
ø380x63mm

CO-HALO-F80W

12,800LM±5%
3.6kg±5%
ø380x63mm

CO-HALO-F100W

16,000LM±5%
3.8kg±5%
ø380x63mm

CO-HALO-F150W

24,000LM±5%
3.8kg±5%
ø380x63mm

CO-HALO-F200W

32,000LM±5%
5.6kg±5%
ø500x68mm

CO-HALO-F240W

38,400LM±5%
5.6kg±5%
ø500x68mm

Specifications

WATTAGE	50/80/100/150/200/240W
DRIVER	MEANWELL
LAMP EFFICIENCY	160LM/W±5%
LIGHT SOURCE	LUMILEDS
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
BEAM ANGLE	60°/90°/120°
IP GRADE	IP69K
OPERATING TEMP	-40°C~55°C

Food Grade Material


Safety guarantee

No toxic chemicals - NSF+ROHS approved.

No water/steam/dust ingress - IP69K protection.

No dangerous parts - PC lens & integrated design, prevent parts from falling even under impact.

LED Highbay Light 4BAY

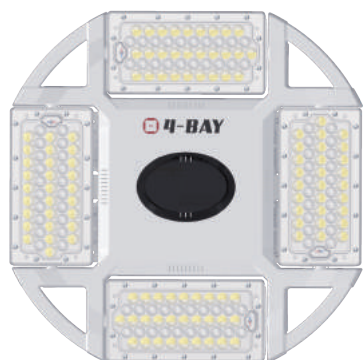

WATTAGE	100/150/200/240/300/400/480W
DRIVER	MEANWELL
LAMP EFFICIENCY	150LM/W±5%
LIGHT SOURCE	LUMILEDS
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
BEAM ANGLE	60°/120° (100/150/200/240W) 30°/60°/90°/120° (300/400/480W)
IP GRADE	IP65
HEAT SINK	ALUMINIUM COOLING FIN ALUMINIUM RIVET
OPERATING TEMP	-40°C~60°C



CO-4BAY-100W

15,000LM±5%
4.5kg±5%
192PCS LED
429×429×159mm

CO-4BAY-150W

22,500LM±5%
4.5kg±5%
288PCS LED
429×429×159mm



CO-4BAY-200W

30,000LM±5%
5.3kg±5%
384PCS LED
429×429×159mm

CO-4BAY-240W

36,000LM±5%
5.3kg±5%
480PCS LED
429×429×159mm



CO-4BAY-300W

45,000LM±5%
7.1kg±5%
112PCS LED
429×429×225mm


CO-4BAY-400W

60,000LM±5%
7.4kg±5%
144PCS LED
429×429×225mm

CO-4BAY-480W

72,000LM±5%
7.4kg±5%
192PCS LED
429×429×225mm

Feature

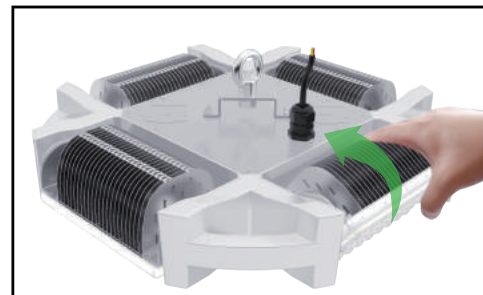

- Ultralight
- Module Adjustable Toolless
- Module Rotatable 200°



- Build-In Sensor Available
- High Luminous Flux
- Installation & Maintenance Friendly

Original Design Heat-Sink



100/150W
Aluminium Rivet



200/240W
Aluminium Cooling Fin



300/400/480W
Aluminium Cooling Fin

Ultra Flood Light T500



CO-T500-480W

79,200LM±5%
12.0kg±5%
536×165×579mm




CO-T500-720W

118,800LM±5%
16.0kg±5%
691×202×579mm



CO-T500-960W

158,400LM±5%
19.6kg±5%
846×202×579mm

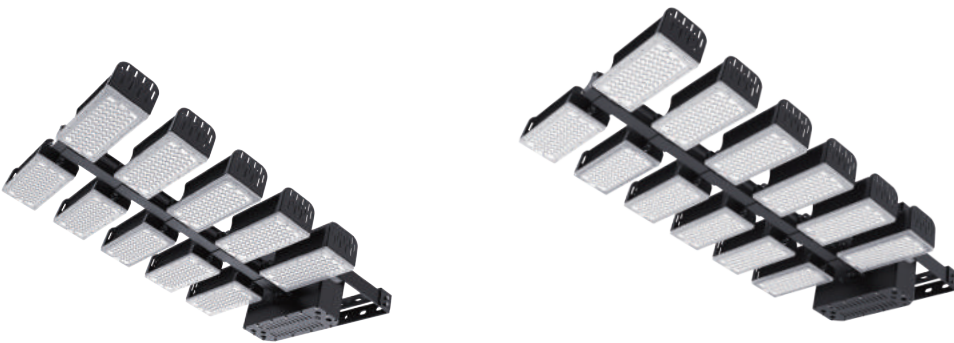

CO-T500-1200W

198,000LM±5%
24.0kg±5%
1001×277×579mm



CO-T500-1440W



237,600LM±5%
28.0kg±5%
1156×277×579mm

Specifications

WATTAGE	480/720/960/1200/1440W
DRIVER	MEANWELL
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
IP GRADE	IP66
HEAT-SINK	ALUMINIUM COOLING FIN
OPERATING TEMP	-40°C~60°C

LAMP EFFICIENCY	BEAM ANGLE	LED SOURCE	LED QUANTITY
165LM/W±5%	60°/90°/120°	LUMILEDS	62LEDS EACH MODULE
155LM/W±5%	30°	LUMILEDS	62LEDS EACH MODULE
120LM/W±5%	10°	CREE	60LEDS EACH MODULE

Detail Pictures

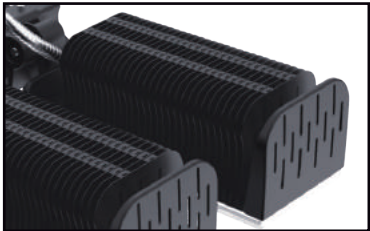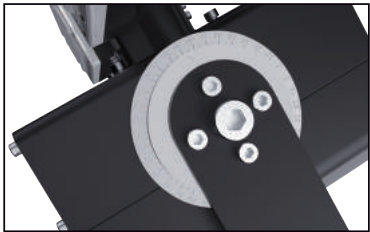

Optional Laser Pointer Device

Double Bracket

Rotatable Module Design

360°

140°



165LM/W

There are more than 50,000 stadiums in the world. Those sports fields not illuminated by G-COMIN provide us with our mission incentive.

LED Flood Light T400

CO-T400A-100W

16,000LM±5%
2.9kg±5%
48PCS LED
291×102×266mm



CO-T400B-60W

9,600LM±5%
2.4kg±5%
24PCS LED
291×102×266mm

CO-T400A-200W

32,000LM±5%
4.2kg±5%
96PCS LED
291×219×334mm




CO-T400B-120W

19,200LM±5%
3.8kg±5%
48PCS LED
291×219×334mm

CO-T400A-300W

48,000LM±5%
5.6kg±5%
144PCS LED
291×340×324mm



CO-T400B-180W

28,800LM±5%
4.7kg±5%
72PCS LED
291×340×324mm

CO-T400A-400W

64,000LM±5%
7.4kg±5%
192PCS LED
485×219×334mm



CO-T400B-240W

38,400LM±5%
5.9kg±5%
96PCS LED
485×219×334mm

CO-T400A-600W

96,000LM±5%
10.3kg±5%
288PCS LED
485×340×324mm



CO-T400B-360W


57,600LM±5%
8.6kg±5%
144PCS LED
485×340×324mm

Specifications

WATTAGE	60/120/180/240/360W 100/200/300/400/600W
DRIVER	MEANWELL
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
IP GRADE	IP65
HEAT-SINK	ALUMINIUM COOLING FIN
OPERATING TEMP	-40°C~60°C

	60°/90°/120°	30°	10°
	LUMILEDS	LUMILEDS	CREE
T400A	160LM/W±5%	150LM/W±5%	120LM/W±5%
	48LEDS EACH MODULE		
T400B	160LM/W±5%	150LM/W±5%	120LM/W±5%
	24LEDS EACH MODULE		



Contrast




T400A

VS

T400B




48pcs LEDs Each Module




LED Quantity


Heat-Sink



24pcs LEDs Each Module




Feature

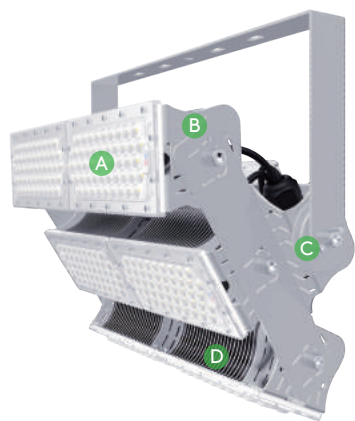


High Transparency Lens



Laser Scale Design




Angle Scale Plate



High Efficient Heatsink

Adjustable Function

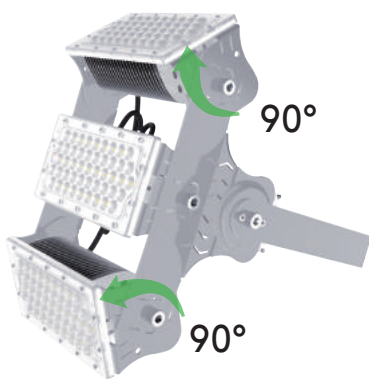

Rotatable Module



360° Rotatable Holder



160LM/W

This 97m tower was every inch the pride of its creators and we've made it even more elegant.

LED Flood Light T300A



WATTAGE	75/150/240W
DRIVER	MEANWELL
LAMP EFFICIENCY	140LM/W±5%
LIGHT SOURCE	LUMILEDS
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
BEAM ANGLE	45°/75°/120°
IP GRADE	IP65
HEAT SINK	ALUMINIUM COOLING FIN
OPERATING TEMP	-40°C~60°C



CO-T300A-75W

10,500LM±5%
2.1kg±5%
96PCS LED
237×102×162mm



CO-T300A-150W

21,000LM±5%
3.5kg±5%
192PCS LED
295×210×274mm




CO-T300A-240W


33,600LM±5%
5.0kg±5%
288PCS LED
295×319×274mm



Multiple optical lens choices are available with angles including 45°/75°/120°



Rotatable module

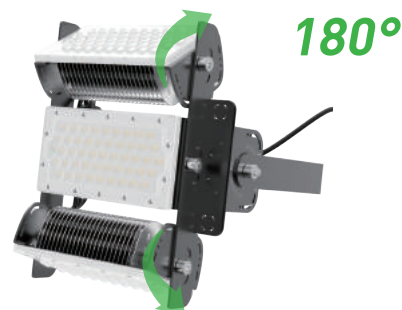

Module rotatable 180°



Arc bracket rotatable 360°

Feature



◀ Bracket scale

Module scale ▶



LED Post Top Light HALO-L



WATTAGE	50/80/100/150/200/240W
DRIVER	MEANWELL
LAMP EFFICIENCY	160LM/W±5%
LIGHT SOURCE	LUMILEDS
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
BEAM ANGLE	60°/90°/120°
IP GRADE	IP66
OPERATING TEMP	-40°C~60°C
POLE SIZE	60/80mm

CO-HALO-L50W

8,000LM±5%
3.6kg±5%
ø380x162mm

CO-HALO-L80W

12,800LM±5%
4.0kg±5%
ø380x162mm

CO-HALO-L100W

16,000LM±5%
4.1kg±5%
ø380x162mm

CO-HALO-L150W

24,000LM±5%
4.2kg±5%
ø380x162mm

CO-HALO-L200W

32,000LM±5%
6.0kg±5%
ø500x168mm

CO-HALO-L240W

38,400LM±5%
6.0kg±5%
ø500x168mm

Unique appearance, stylish
decoration for your public space.

Annular luminous surface,
efficient and comfortable lighting.

All aluminium body resists
corrosion and ages well.

Smooth curve surface gather no
dirt/leaf/snow/ice, self-cleaning with
the assistants of wind and rain.

IP66 & IK10

LED Street Light T400L

CO-T400L-120W 19,200LM±5% 4.4kg±5% 48PCS LED 478×220×169mm		CO-T400L-200W 32,000LM±5% 4.6kg±5% 96PCS LED 478×220×169mm
CO-T400L-180W 28,800LM±5% 5.5kg±5% 72PCS LED 478×338×169mm		CO-T400L-300W 48,000LM±5% 6.3kg±5% 144PCS LED 478×338×169mm
CO-T400L-240W 38,400LM±5% 6.2kg±5% 96PCS LED 670×221×205mm		CO-T400L-400W 64,000LM±5% 7.8kg±5% 192PCS LED 670×221×205mm


Specifications

WATTAGE	120/180/200/240/300/400W
LIGHT SOURCE	LUMILEDS
DRIVER	MEANWELL
LAMP EFFICIENCY	160LM/W±5% (60°/90°/120°) 150LM/W±5% (30°)
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
BEAM ANGLE	30°/60°/90°/120°
IP GRADE	IP65
HEAT-SINK	ALUMINIUM COOLING FIN
OPERATING TEMP	-40℃~60℃
POLE SIZE	60mm


Installation



Detail

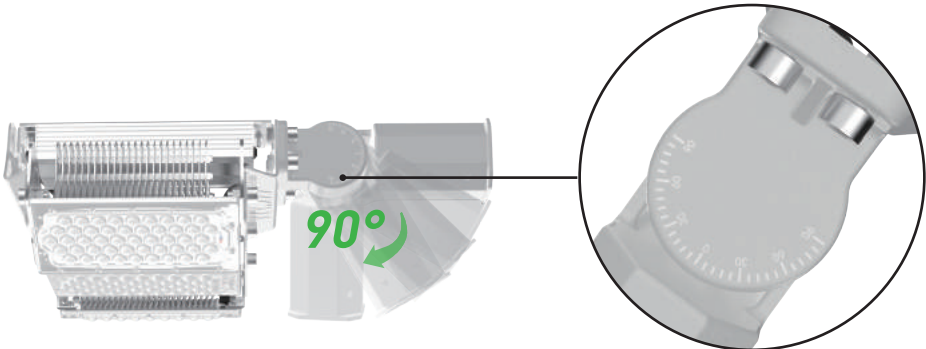

Bracket Scale



◀ 100W Module
60W Module ▶

Aluminium Cooling Fin

LED Street Light L300



CO-L300-60W

7,800LM±5%
3.7kg±5%
72PCS LED
81×271×437.5mm



CO-L300-120W

15,600LM±5%
4.9kg±5%
144PCS LED
81×271×547.5mm



CO-L300-180W

23,400LM±5%
5.8kg±5%
216PCS LED
81×271×657.5mm



CO-L300-240W

31,200LM±5%
6.8kg±5%
288PCS LED
81×271×767.5mm

Specifications

WATTAGE	60/120/180/240W
LIGHT SOURCE	LUMILEDS
LED QUANTITY	72 LEDS EACH MODULE
DRIVER	MEANWELL
LAMP EFFICIENCY	130LM/W±5%
CRI	Ra>70/80
CCT	2700-6500K
RATED VOLTAGE	AC 100-240V 277V~, 50/60Hz
POWER FACTOR	>0.95
BEAM ANGLE	X-135°,Y-65°
IP GRADE	IP66
HEAT-SINK	ALUMINIUM COOLING FIN
OPERATING TEMP	-40°C~60°C

Feature




Adjustable high strength bracket to suit various pole types and diameters.



Each module is rotatable allowing easy adjustment to suit different road widths.

G Track

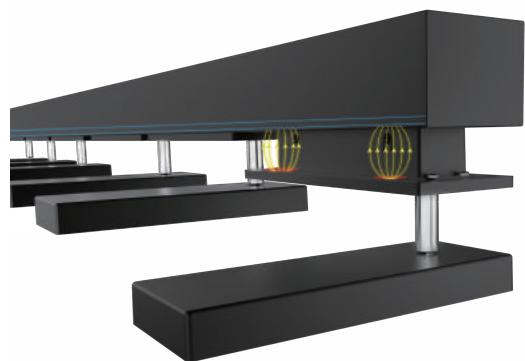

► Magnetic Suction



30pcs LEDs Each Module
Beam Angle: 120°




9pcs LEDs Each Module
Beam Angle: 30°

Specifications

WATTAGE	LAMP LUMINOUS FLUX	MATERIALS	CRI
15W	1500-1600LM	ALUMINIUM	Ra>80/90
CCT	RATED VOLTAGE	POWER FACTOR	OPERATING TEMP
2700-6500K	AC 220-240V 50/60Hz	>0.95	-30°C~40°C

Feature



Connect without wiring,
just plug in.




360°
Horizontally Adjustable



90°
Vertically Adjustable


G Track Down Light

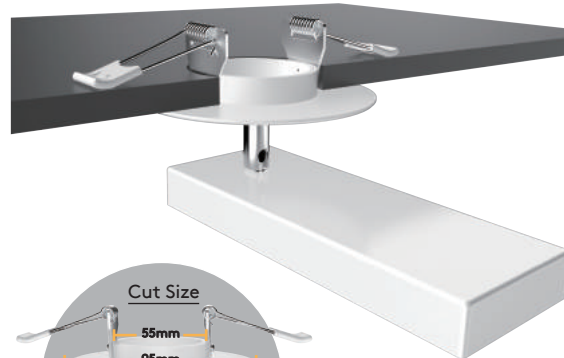

30pcs LEDs Each Module
Beam Angle: 120°




9pcs LEDs Each Module
Beam Angle: 30°



Specifications

WATTAGE	LAMP LUMINOUS FLUX	MATERIALS	CRI
15W	1500-1600LM	ALUMINIUM	Ra>80/90
CCT	RATED VOLTAGE	POWER FACTOR	OPERATING TEMP
2700-6500K	AC 220-240V 50/60Hz	>0.95	-30°C~40°C

Adjustable Module

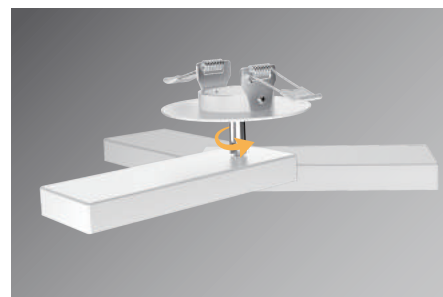

360° Horizontally Adjustable



90° Vertically Adjustable



About Company

Since 2011 Shenzhen Coming Technology Co., Ltd have specialised in the design and manufacture of innovative LED lighting products and associated services. In addition to unique and high quality products we also provide professional support for all our products to ensure our customers make the most of our capabilities, including:

Highbay light | Flood light | Street light | Down light | Track light
OEM service | Project solutions | Dialux simulation

We always value comments from our customers. For further information please contact us on info@co-ming.com.



PROJECT GALLERY


Factory

Metallurgical
Factory



Warehouse

Port



Warehouse

Industrial
Park



Power Station

Factory



Football ▶
Field



▲ Workshop




▲ BMX Track

Billboard ▶




▲ Architecture Lighting

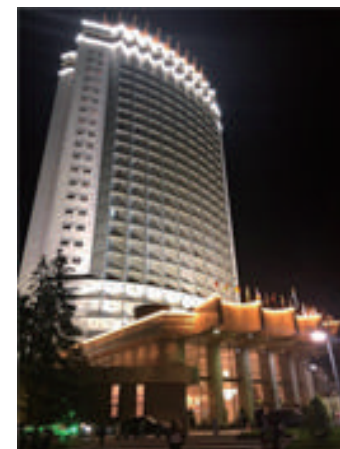

▲ Hotel

Warehouse ▶

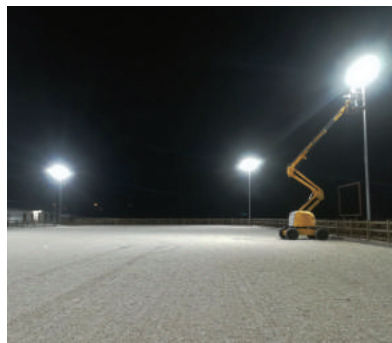

▲ Race Course



▲ Tennis Court



▲ Warehouse



▲ Port



▲ Football Field



Gas Station ▶

Auto Repair ▼

Railway Station ▶

Airport ▲

Football Field ▼



▲ Parking



▲ Garage



🔗 Check more products application worldwide
www.co-ming.com/project