

COMING

COMING

SHENZHEN COMING TECHNOLOGY CO.,LTD

Tel: +86-755-25409373

Web: www.cominguv.com

E-mail: info@cominguv.com

Add: Coming Industrial Park, Longgang District, Shenzhen, China

CREATE LIFE

Shining a light on UV technology

www.cominguv.com

PRODUCT

Air Disinfection

CO-X1 03-04

CO-X2 05-06

Surface Disinfection

CO-X3 07-08

4Bay-UV Purifier 09-10

Mobile 4Bay-UV Sterilizer 11-12

CO-X5 13-14

HVAC Disinfection

CO-X4 15-16


About Us 17-18

Application of air disinfection 19


Case 20



UV Air Disinfection CO-X1





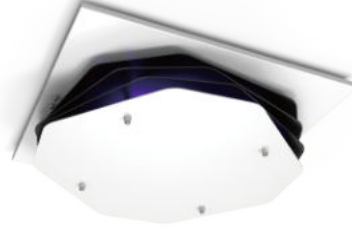

CO-X1-300



CO-X1-600


Features

-  Evidenced broad-spectrum antivirus & antibiosis (Include Coronavirus & its variants)
-  Continuous air sterilization and purification in the presence of people
-  Safe sterilization without any chemical residues
-  A variety of installation methods, suitable for different places


Specifications

| Type | CO-X1-300 | CO-X1-600 |
|---------------------------|---------------------|-----------|
| Light Source | UV LED | |
| Rated Voltage | AC 100-277V 50/60Hz | |
| Air circulation system | No | |
| Lamp included | Yes | |
| Color | White/Black | |
| Optimal temperature range | -20~ 40°C | |
| Lifetime | 10000h | |

Disinfection Space Recommendation



CO-X1-300




CO-X1-600


Application



Hospital



Aisle




Meeting Room




Office

Dimension (Unit: mm)



CO-X1-300




CO-X1-600

UV Air Disinfection CO-X2





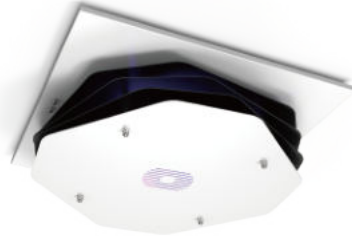

CO-X2-300



CO-X2-600


Features

-  Air circulation system to accelerate sterilization
-  Continuous air sterilization and purification in the presence of people
-  No extra labor or disinfectant supplement required
-  Safe sterilization without any chemical residues


Specifications

| Type | CO-X2-300 | CO-X2-600 |
|---------------------------|---------------------|-----------|
| Light Source | UV LED | |
| Rated Voltage | AC 100-277V 50/60Hz | |
| Air circulation system | Yes | |
| Lamp included | Yes | |
| Color | White/Black | |
| Optimal temperature range | -20~ 40°C | |
| Lifetime | 10000h | |

Disinfection Space Recommendation

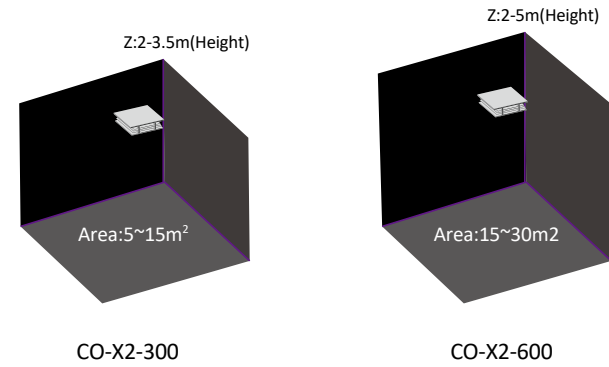

Application

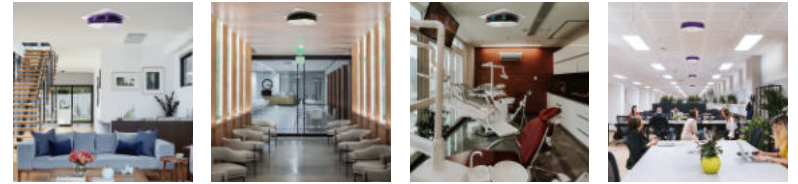


Home

Public area

Clinic

Workspace

Dimension (Unit: mm)

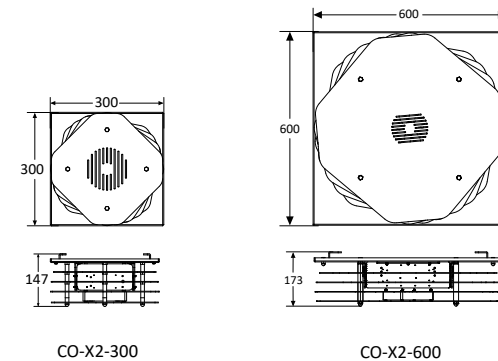





Automatic UV Disinfection CO-X3



Specifications

| | |
|---------------------------|----------------------|
| Type | CO-X3 |
| Light Source | UV LED |
| Rated Voltage | AC 100-277V, 50/60Hz |
| Color | White/Black |
| Optimal temperature range | -20~ 40°C |
| Lifetime | 10000h |
| Weight | 2.2kg±5% |
| Size | 300x300x110mm |

Features

-  Well-documented broad-spectrum antiviral and antibacterial drugs (including coronavirus and its variants).
-  The product does not contain mercury, does not produce ozone, and has no pungent odor.
-  Induction device, friendly to people.
-  Stylish and simple appearance, suitable for any place.

Application



Fitting room



Unmanned store



Reading room



Baby Care room



Public toilet



Smoking room





Laundry room




Elevator

Dimension (Unit: mm)





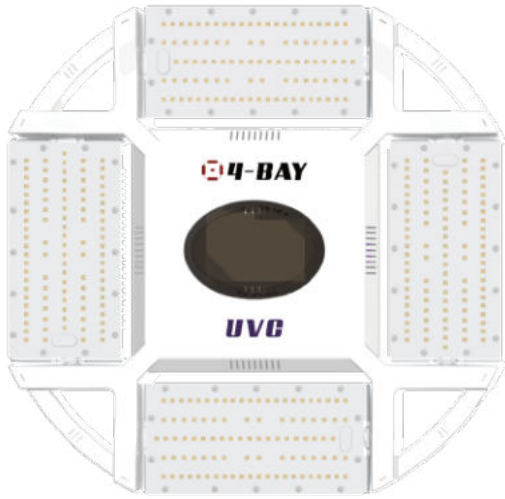



4Bay-UV Purifier



Specifications

| | | | | |
|----------------|-----------------------|------|------|------|
| Wattage | 50W | 100W | 150W | 200W |
| Driver | MEANWELL | | | |
| Rated voltage | AC 100-240V , 50/60Hz | | | |
| Power factor | >0.95 | | | |
| Heat sink | Aluminium cooling fin | | | |
| Operating temp | -40 °C~40 °C | | | |
| Size | 429x429x159 mm | | | |


Features

-  Minimal additional spend with lower operational costs than regular gas fluorescent lighting
-  Alarm device protects workforce from any harmful UVC radiation dosage
-  Easy to operate and maintain
-  No Mercury & Ozone emissions during operation together with no 'end of life' disposal issues
-  Keep the operation area under lights clean from pathogenic bacteria
-  Silent potent disinfection providing assured peace of mind


Application




Factory



Classroom





Warehouse



Office

Dimension (Unit: mm)

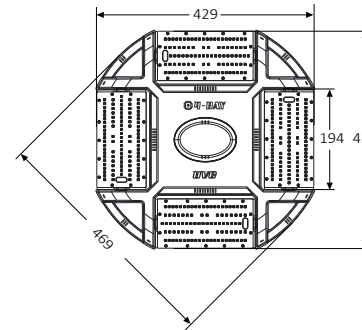

Mobile 4Bay-UV Sterilizer



Specifications


| | |
|---------------------|-----------------|
| Wattage | 50/100/150/200W |
| Limiting altitude | 1.5m |
| Horizontal rotation | X-360°(Box) |
| Vertical rotation | Y-180°(Product) |
| Size | 500x300x1030mm |

Feature




- Spectral Wavelength: 200-280nm
- Mobile & Single Placement
- Motion Sensor Protection
- Flexible Target Disinfection Area
- Easy to transport and store

DetailFeature

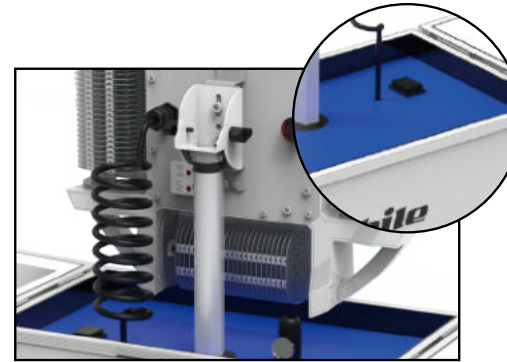


One key rising the pole
Maximum height 1.5m

Ergonomics Design

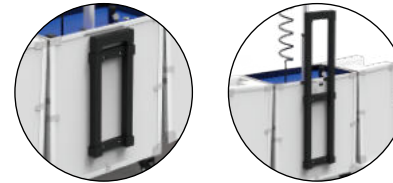

Loose the screw to adjust, 180° available



Toolless rotatable 200° available





Mercury-Free UV Germicidal Lamp CO-X5








CO-X5-300



CO-X5-600




Features

-  Higher safety, no mercury
-  Stronger, lightweight aluminum material
-  More efficient, instant sterilization without preheating
-  More convenient, no ventilation required during/after use
-  More in line with your needs, provide personalization customization

Specifications

| Type | CO-X5-300 | CO-X5-600 |
|---------------------------|----------------------|-----------|
| Power | 20W | 40W |
| Light Source | UV LED | |
| Rated Voltage | AC 100-120V/220-240V | |
| Color | Sliver | |
| Optimal temperature range | -20~40 °C | |
| Lifetime | 10000h | |

Dimension (Unit: mm)

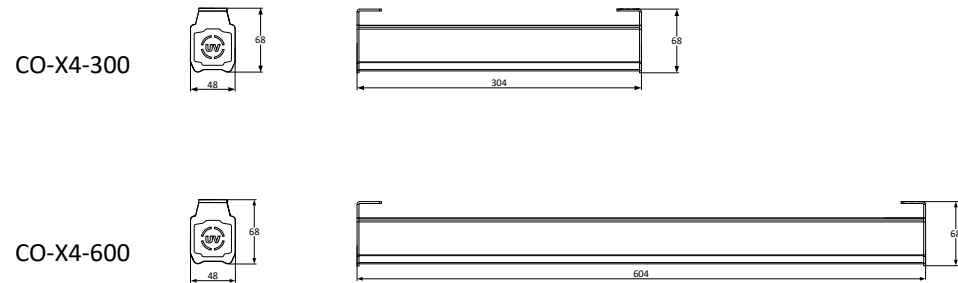

Designed for In-duct use CO-X4



CO-X4-300

CO-X4-600



Specifications

| | | |
|---------------------------|----------------------|-----------|
| Type | CO-X4-300 | CO-X4-600 |
| Power | 20W | 40W |
| Light Source | UV LED | |
| Rated Voltage | AC 110-120V/220-240V | |
| Color | Sliver/Blue | |
| Optimal temperature range | -20~40 °C | |
| Lifetime | 10000h | |

Features



No mercury leakage risk



Does not take up space and runs quietly



Plug & Play system



Corrosion-resistant light-weight Aluminium

Benefits



Does not produce ozone or other secondary, chemical compounds



Indicator lights indicate normal operation of the device



Eliminates up to 99.9% of bacteria, mold and viruses



Low operating and maintenance costs







Flexible installation in-duct



Special sizes on request

Dimension (Unit: mm)



CO-X4-300

CO-X4-600

ABOUT US

Shenzhen COMING Technology Co., Ltd. was established in 2011. At the beginning of its establishment, we have been committed to providing customers with first-class products and services. With the development of the natural environment, in order to meet greater challenges, we are the first to provide UV sterilization solutions.

Our engineers have deep technical knowledge in ultraviolet radiation, lamp design, lamp operation, and industry knowledge. The professional R&D team can provide unparalleled innovation ability in sterilization. At the same time, we are committed to providing ecologically harmless solutions, striving to strike a balance between environmental protection and public safety and the need for effective disinfection. We will continue to develop technologies that are vital to the health of the earth's indispensable resources (such as clean air, water, etc.).

Whether you are using it at home or in the industry, we can provide you with tailor-made solutions.

So far, our disinfection and sterilization products have been sold to various countries around the world, including the United States, Russia, the United Kingdom, France, South Korea, Japan, Brazil, the United Arab Emirates, Indonesia, and other countries.

EXPLORE THE POWER OF UV-C TECHNOLOGY

In order to realize the maximum benefits of the UV-C system, high-quality UV-C products must be used.

COMING is an innovative and forward-looking manufacturer that provides our customers with high-quality light products and many other advantages. Compared with traditional sterilization methods, the use of cost-effective UVC disinfection solutions can bring many benefits to a wide range of applications.

Durable and high-quality sterilization light have many advantages, such as:

UV-C effectively deactivates most viruses and germs on directly irradiated air.

Compared with the residual chemical agents in conventional chemical disinfection, UVC sterilization has no residue.

Environmentally friendly - no ozone emissions during or after use.

Safe and reliable to use, open as you use it.



www.cominguv.com



info@cominguv.com

APPLICATION OF AIR DISINFECTION

The rapid disinfection feature of the air disinfection makes it very widely used. You can install it in a variety of indoor places, including warehouses, hospitals, hotels, toilets, schools, restaurants, etc.

CO-X1 Series

- Laboratory



- Meeting room



CO-X2 Series

- Public toilet



- Rest area



CASE

Through the actual product application diagram, we will show you more possibilities of the product.

