



Rotary Wiper Camera Unit



Assumed Operating Environment

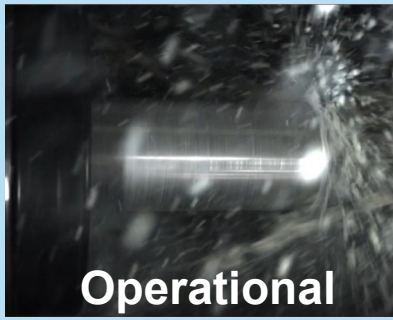

Operational

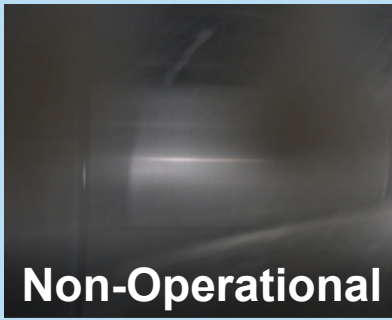


Non-Operational

FEATURE

- ✓ Can be used in environment with splash water and oil
- ✓ Liquid is removed by centrifugal force and rotating the built-in fins with air
- ✓ Sapphire Glass is used to protect the camera



Rotary Wiper Camera Unit

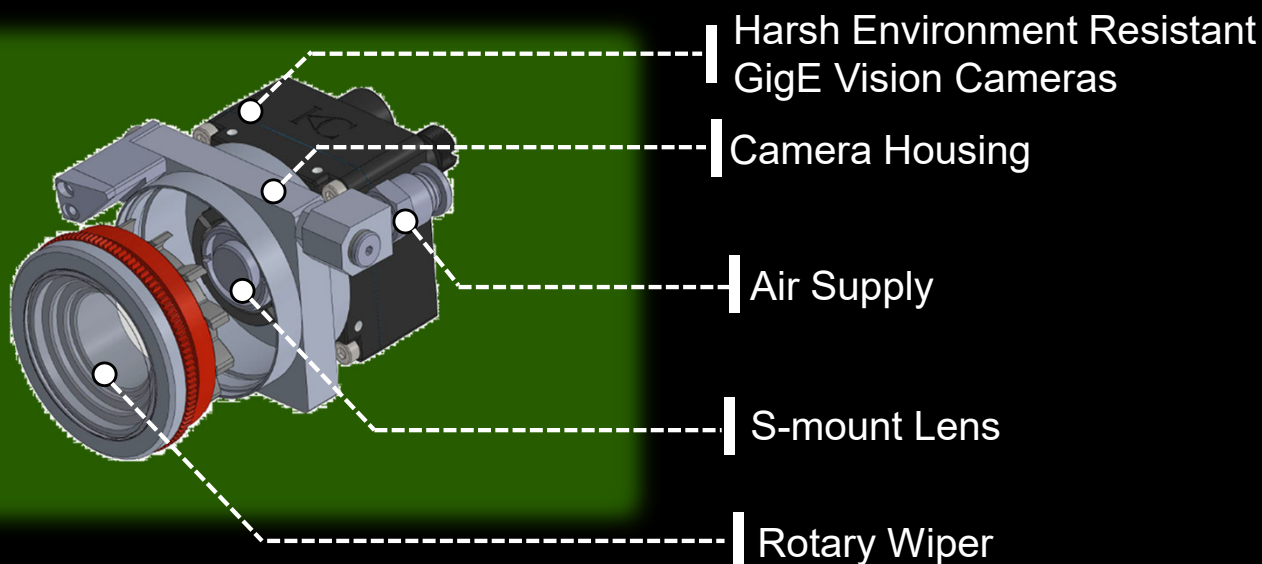

SPECIFICATION

Camera	Global Shutter : 0.48Mp、1.3MP、3MP IP Camera : Full HD(2MP)
Lens	f=3.5mm,5mm,8mm,12mm,16mm,25mm
Operating environment	0°C ~ +45°C
Material	AL, POM
Air temperature	**
Air pressure	0.05 ~ 0.1MPa
Air flow rate	15 ~20L / min
Weight	120g *Not include Camera and Lens
Size	(H)50mm×(W)50mm×(D)35.5mm *Rotary Wiper Unit only
IP code (camera)	IPX7

WEBSITE



Kowa American Corporation

2001 South Vermont Avenue, Torrance, CA 90502, U.S.A

TEL : +1(310)327-1913 E-mail : customerservice@kowa.com

URL : <https://www.kowa-usa.com/>